


**STAINLESS STEEL
BRIGHT BARS**



Product	Size Range	Tolerance	Lenght	Value Addition
Round Bars (CD/PO)	3.00 - 30.00mm (1/8" to 1-3/16")	ASTMA484 , or as per requirement +/- 0.0005"	2.0 to 7.0 Mtrs (tolerance of +/-5mm)	Chamfering of sizes 9.52mm and above
Round Bars (CG/PO)	5.00 - 30.00mm (3/16" to 1-3/16")	ASTMA484 , or as per requirement +/- 0.0005"	2.0 to 7.0 Mtrs (tolerance of +/- 5mm)	Chamfering of sizes 9.52mm and above
Square Bars	5.00 - 25.40 mm (3/16" to 1")	ASTMA484 , or as per requirement	2.0 to 7.0 Mtrs (tolerance of+/-5mm)	
Hex Bars	6.00 - 25.40mm (3/16" to 1")	ASTMA484, or as per requirement	2.0 to 7.0 Mtrs (tolerance of+/- 5mm)	
Threaded Bars (Stud Bars)	6.00 - 20.00mm (1/4" to 3/4")	As per requirement	2.0 to 4.0 Mtrs (tolerance+/-5mm)	

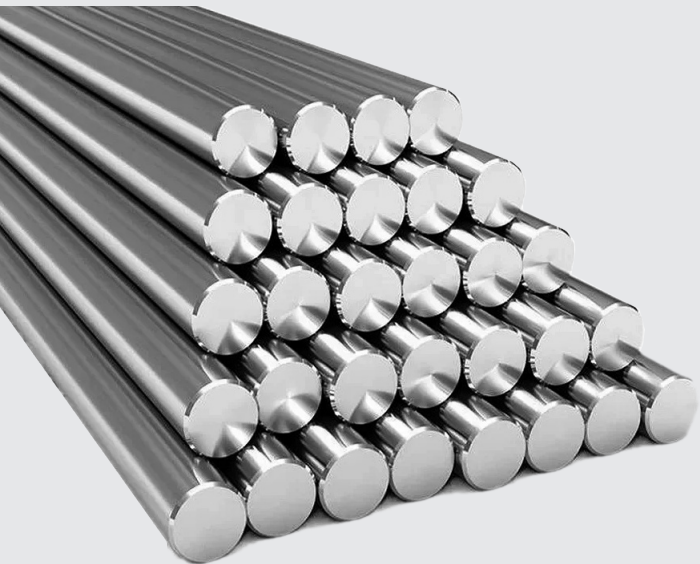